



WELL NO.: 2/7-3

OPERATOR: PHILLIPS

TOTAL DEPTH 4359 m

ELEV KB 30 m

WATER DEPTH 69 m

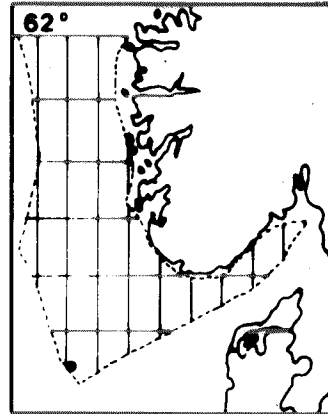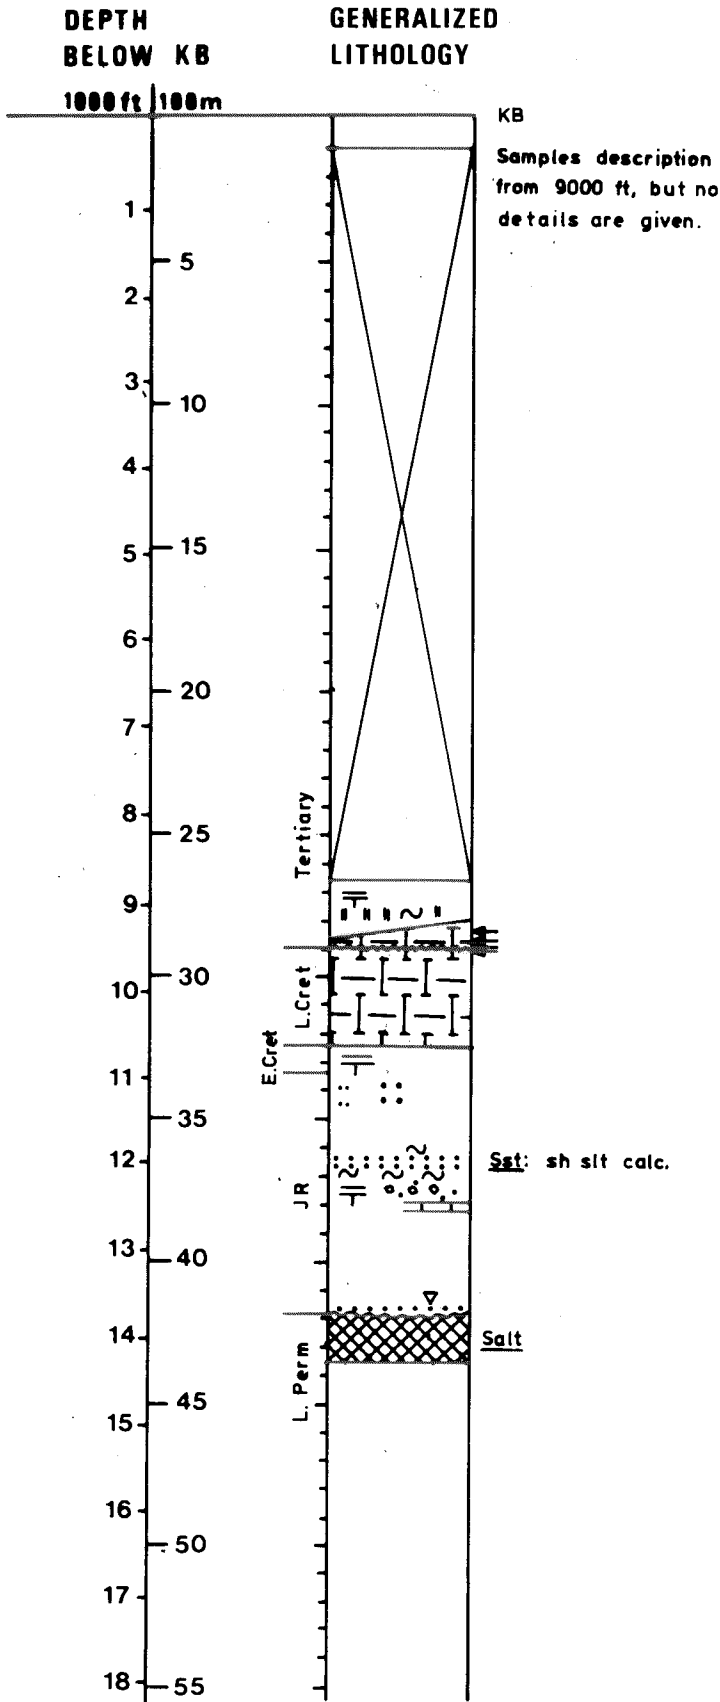

- | | |
|----------------|---------------|
| Conglomerate | Marl |
| Breccia | Limestone |
| Sandstone | Ls chalky |
| Silt | Dolomite |
| Siltstone | Anhydrite |
| Clay | Gypsum |
| Claystone | Sandy (Sandy) |
| Shale | Silty (Silty) |
| Rock Salt | Argillaceous |
| Potassium Salt | Tuffaceous |
| Metamorphic | Macrof Fragm |
| Igneous | Pyrite |
| Extr intr. | Glauconite |
| Lignite / carb | |
| Coal | |
| Microfossil | |
| Plant remn | |
| Chert | |

← Core
 Unconformity

- Plio - Pliocene
- Mio - Miocene
- Olig - Oligocene
- Eoc - Eocene
- Pal - Paleocene
- Dan - Danian
- LCret - Late Cretaceous
- ECret - Early Cretaceous
- JR - Jurassic
- TR - Triassic
- Perm - Permian
- Basem - Basement

WELL NO 2/7-3
 COORDINATES 56°23'0"N 03°14'42"E
 LICENSEE Phillips Group
 LICENSE NO 18
 PERMIT NO 68
 CONTRACTOR Intern. Drilling Co. (IDC)
 RIG Orion
 SPUD DATE 14. April 1972
 COMPLETION DATE 11. October 1972

SPUD CLASSIF Appraisal
 COMPL CLASSIF _____
 FMTN AT TD Permian Evaporites
 PROD FMTN Danian Limestone
 BHT _____ °C

CASINGS				
TYPE	DIAM inches	DEPTH BELOW KB m	HOLE DIAM inches	DEPTH BELOW KB m
COND	30	133	30	133
SFC	20	482	26	487
INT	13 3/8	1585	17 1/2	1591
INT	9 5/8	3184	12 1/4	3195
INT	7	4194	8 1/2	4359
PROD				

HOLE DEVIATION	
DEPTH m	DEGREES
133	4.5
312	0.5
487	0.5
904	1.0
3226	3.3
3457	4.8
3810	6.9
4109	8.7
4186	9.5

CONVENTIONAL CORES				
NO	INTERVAL m	RECOVERY		
		m	QUALITY	%
1	2851.1-2862.0	4.97	Good condition	44.7
2	2862.0-2874.0	1.22	"	9.8
3	2875.0-2890.0	11.28	"	75.5
4	2890.0-2901.0	1.52	"	12.8

AVAILABLE LOGS			
TYPE	INTERVAL m	1/200	1/500
GR	99-1591	x	x
BHC	436-1591	x	x
BHC-C	1589-3193	x	x
"	3193-4191	x	x
"	4197-4318	x	x
IES	480-1591	x	x
"	1589-3197	x	x
"	3197-4205	x	x
"	4205-4315	x	x
DLLd	2682-3197	x	x
"	3191-4191	x	x
MLL-C	2682-3197	x	x
"	3187-4197	x	x
SNP	2682-3196	x	x
"	3187-4176	x	x
FDC	2682-3196	x	x
"	3187-4191	x	x
CDM	2682-3197	x	
CDM-AP	3218-4191		x
CDM-PP	3218-4191		
CBL	27-1570	x	x
"	2438-3048	x	x
"	2438-2958	x	x
"	3200-4176	x	x
"	3187-4197	x	x
SRS	99-4192		x
Mud	488-4359		x

TESTS					
TYPE	NO	INTERVAL m	RECOVERY	FSIP psi	FFP psi
DST	2	2908-2938	778BOPD, 1.1MMCFGD	2067	1404
"	3	2883-2896	4198BOPD, 4.7MMCFGD	6367	5041
"	4	2868-2877	4982BOPD, 5.9MMCFGD	6432	6085
"	5	2806-2856	4481BOPD, 6.1MMCFGD	6768	6692

REMARKS : Out of 18 tests 14 were unproductiv.