




# WELL NO.: 7/12-3

TOTAL DEPTH 3686 m

ELEV KB 24 m

# OPERATOR: BP

WATER DEPTH 71 m

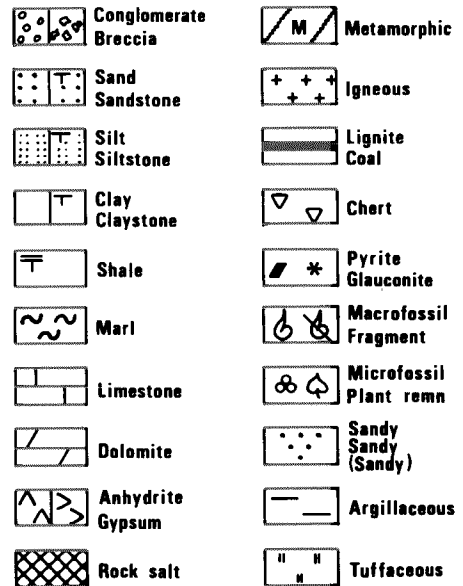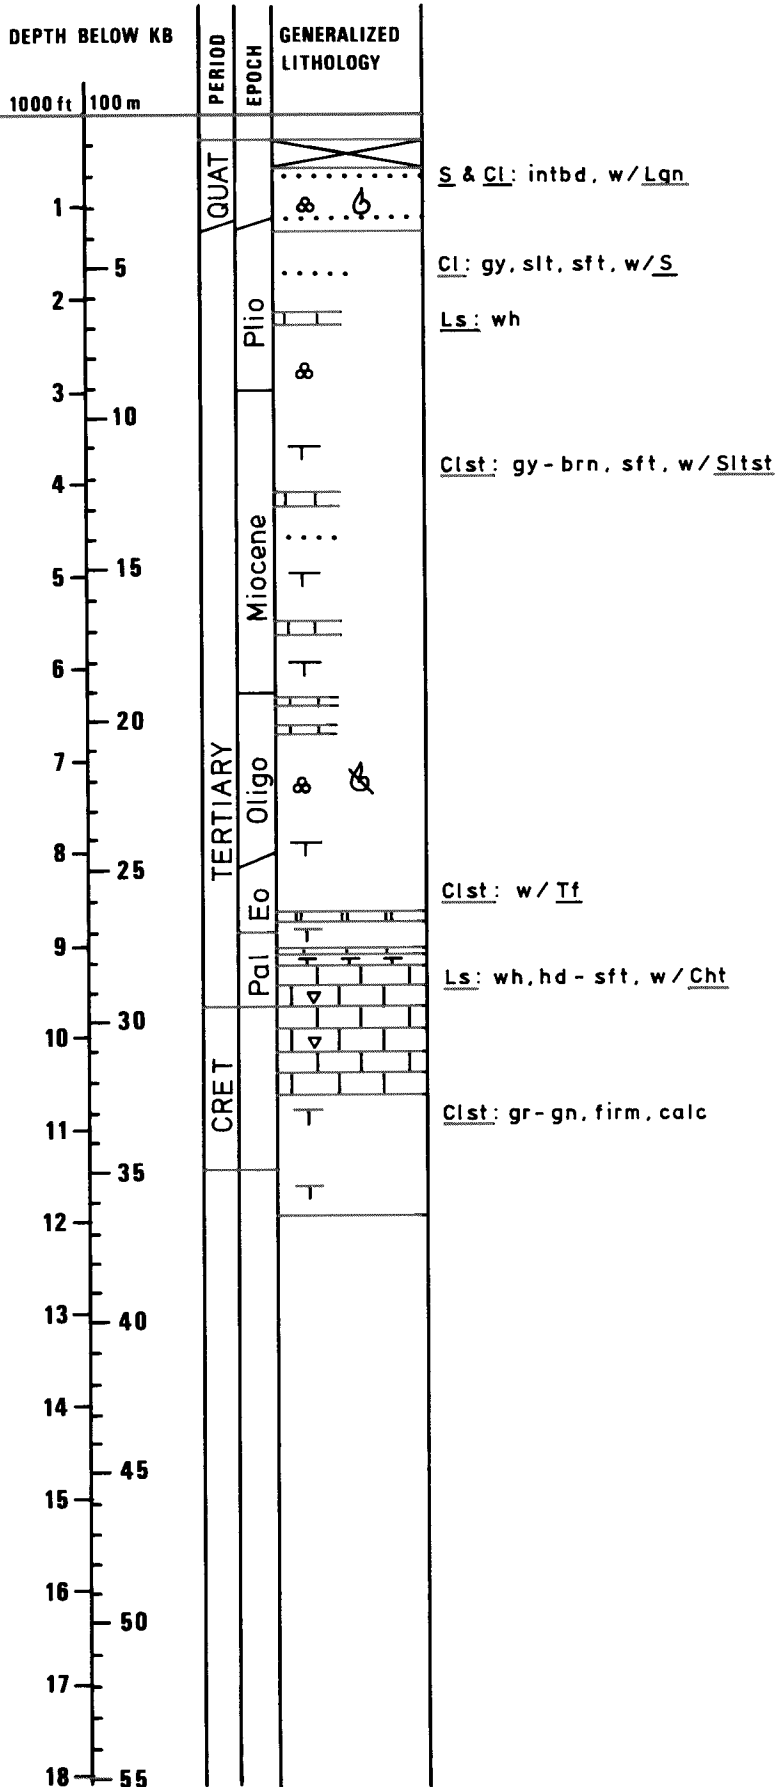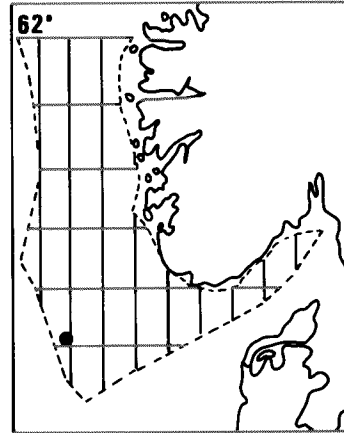

← Core  
 ~~~~~ Unconformity

|       |            |
|-------|------------|
| Plio  | Pliocene   |
| Mio   | Miocene    |
| Oligo | Oligocene  |
| Eo    | Eocene     |
| Pal   | Paleocene  |
| Dan   | Danian     |
| Cret  | Cretaceous |
| JR    | Jurassic   |
| TR    | Triassic   |
| Perm  | Permian    |
| Basem | Basement   |
| E     | Early      |
| M     | Middle     |
| L     | Late       |

WELL NO 7/12-3 FIELD             
 COORDINATES 57°06'24.54"N 02°48'41.56"E  
 LICENSEE BP/Conoco/ Statoil  
 LICENSE NO 019  
 PERMIT NO 174  
 CONTRACTOR Rowan Inc.  
 RIG Norskald  
 SPUD DATE 05. April 1977  
 COMPLETION DATE 03. June 1977

SPUD CLASSIF Appraisal  
 COMPL CLASSIF Plugged back  
 FMTN AT TD Jurassic  
 PROD FMTN             
 REMARKS :

*7/12-3 A was sidetracked from  
 this borehole below 13 3/8" casing.*

| CASINGS |                |                        |                        |                        |
|---------|----------------|------------------------|------------------------|------------------------|
| TYPE    | DIAM<br>inches | DEPTH<br>BELOW KB<br>m | HOLE<br>DIAM<br>inches | DEPTH<br>BELOW KB<br>m |
| COND    | 30             | 169                    | 36                     | 174                    |
| SFC     | 20             | 467                    | 26                     | 470                    |
| INT     | 13 3/8         | 1679                   | 17 1/2                 | 1686                   |
| INT     |                |                        | 12 1/4                 | 3710                   |
| INT     |                |                        |                        |                        |
| LINER   |                |                        |                        |                        |

| AVAILABLE LOGS |               |       |       |
|----------------|---------------|-------|-------|
| TYPE           | INTERVAL<br>m | 1/200 | 1/500 |
| GR             | 191 - 463     | x     | x     |
| ISF/           |               |       |       |
| Sonic          | 463 - 1422    | x     | x     |
| "              | 1680 - 3706   | x     | x     |
| FDC            | 3400 - 3700   | x     | x     |
| CDM            | 3400 - 3699   | x     |       |
| " ap           | 3400 - 3699   | x     | x     |
| " pp           | 3400 - 3699   |       |       |
| CBL            | 235 - 1680    | x     | x     |
| SRS            | 463 - 3706    |       | x     |
| Mud            | 96 - 3710     |       | x     |

| CONVENTIONAL CORES |               |          |         |     |
|--------------------|---------------|----------|---------|-----|
| NO                 | INTERVAL<br>m | RECOVERY |         |     |
|                    |               | m        | QUALITY | %   |
| 1                  | 3609.7-2626.1 |          |         | 100 |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |
|                    |               |          |         |     |

| TESTS |    |               |                                                 |             |            |
|-------|----|---------------|-------------------------------------------------|-------------|------------|
| TYPE  | NO | INTERVAL<br>m | RECOVERY                                        | FSIP<br>psi | FFP<br>psi |
| FIT   | 1  | 3683.0        | Run using RFT tool                              | 7445        |            |
| "     | 2  | 3655.0        | Run using RFT tool                              | 7399        |            |
| "     | 3  | 3610.0        | Run using RFT tool. Failure                     |             |            |
| "     | 4  | 3609.5        | Run using RFT tool. Failure                     |             |            |
| "     | 5  | 3632.5        | Run using RFT tool                              | 7365        |            |
| "     | 6  | 3683.0        | 10.25 l saline water, 72000 ppm Cl <sup>-</sup> | 7339        |            |
|       |    |               |                                                 |             |            |
|       |    |               |                                                 |             |            |

REMARKS