




# WELL NO.: 7/12-4

# OPERATOR: BP

TOTAL DEPTH 3621 m

ELEV KB 25 m

WATER DEPTH 71 m

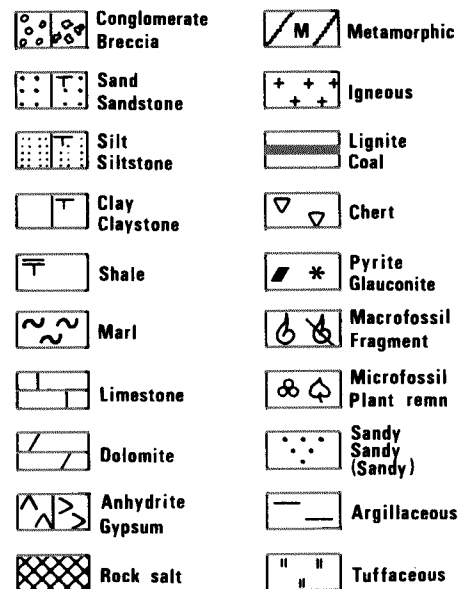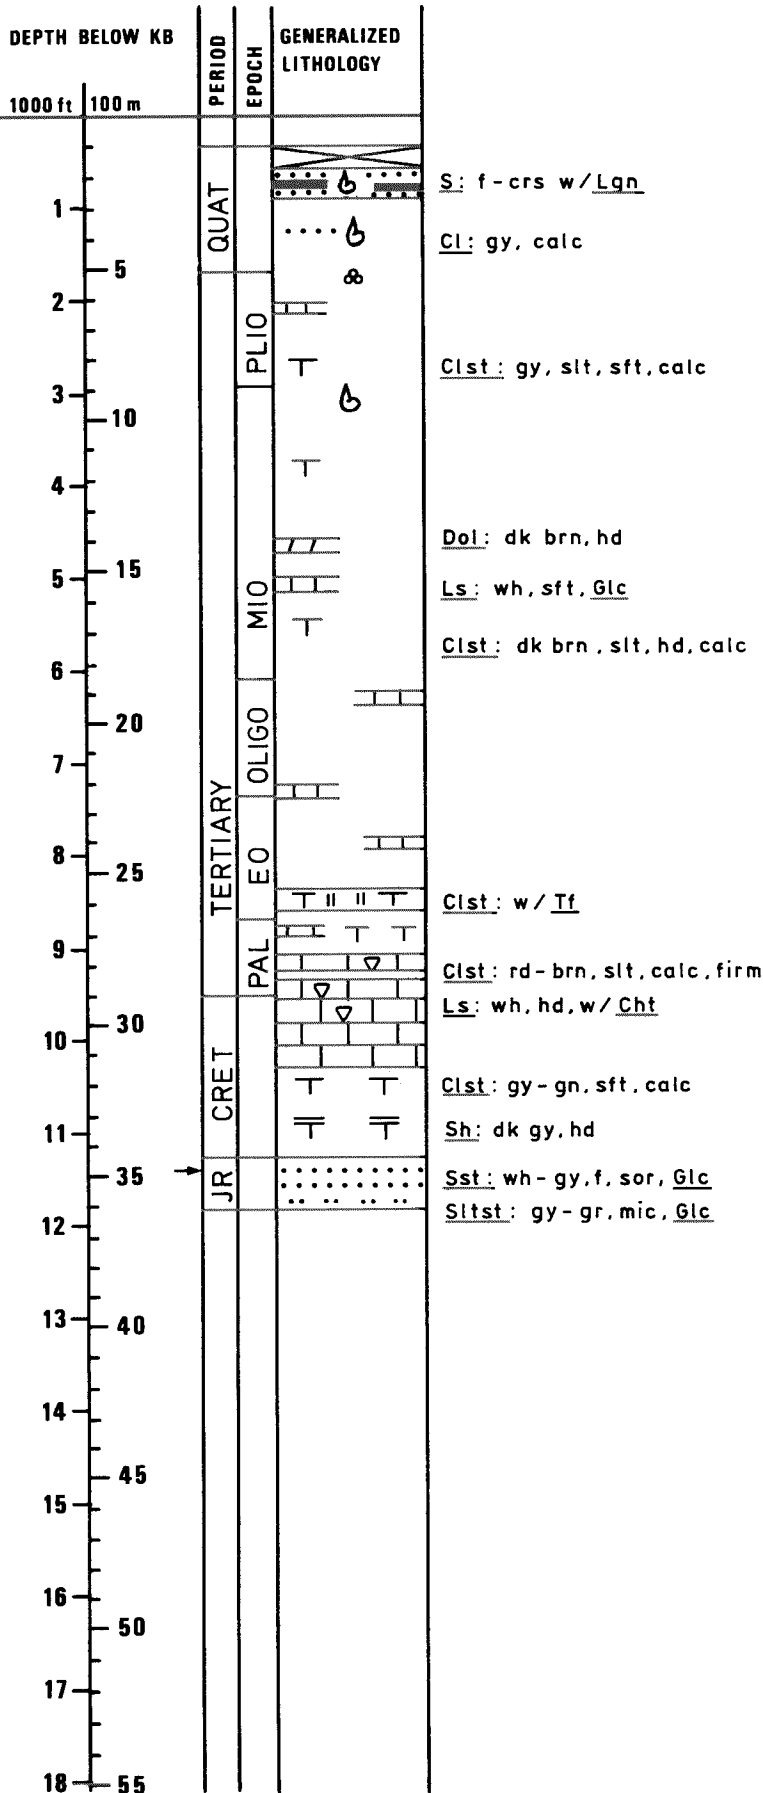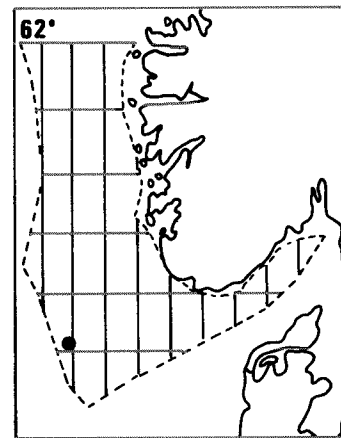

← Core  
 ~~~~~ Unconformity

|       |            |
|-------|------------|
| Plio  | Pliocene   |
| Mio   | Miocene    |
| Oligo | Oligocene  |
| Eo    | Eocene     |
| Pal   | Paleocene  |
| Dan   | Danian     |
| Cret  | Cretaceous |
| JR    | Jurassic   |
| TR    | Triassic   |
| Perm  | Permian    |
| Basem | Basement   |
| E     | Early      |
| M     | Middle     |
| L     | Late       |

WELL NO 7/12-4 FIELD                       
 COORDINATES 57°05'36.66"N 02°51'36.96"E  
 LICENSEE BP/Conoco/ Statoil  
 LICENSE NO 019  
 PERMIT NO 183  
 CONTRACTOR Rowan Co. Inc.  
 RIG Norskald  
 SPUD DATE 11. September 1977  
 COMPLETION DATE 12. December 1977

SPUD CLASSIF Appraisal  
 COMPL CLASSIF Suspended oil well  
 FMTN AT TD Triassic  
 PROD FMTN Jurassic  
 REMARKS :                                     

| CASINGS |             |                  |                  |                  |
|---------|-------------|------------------|------------------|------------------|
| TYPE    | DIAM inches | DEPTH BELOW KB m | HOLE DIAM inches | DEPTH BELOW KB m |
| COND    | 30          | 169              | 36               | 174              |
| SFC     | 20          | 492              | 26               | 498              |
| INT     | 13 3/8      | 1678             | 17 1/2           | 1694             |
| INT     | 9 5/8       | 3369             | 12 1/4           | 3373             |
| INT     |             |                  |                  |                  |
| LINER   | 7           | 3620             | 8 1/2            | 3621             |

| AVAILABLE LOGS |             |       |       |
|----------------|-------------|-------|-------|
| TYPE           | INTERVAL m  | 1/200 | 1/500 |
| GR             | 95 - 480    | x     | x     |
| ISF/           |             |       |       |
| Sonic          | 480 - 1692  | x     | x     |
| "              | 1676 - 3370 | x     | x     |
| "              | 3366 - 3618 | x     | x     |
| FDC/           |             |       |       |
| CNL            | 3366 - 3620 | x     | x     |
| DLL/           |             |       |       |
| MSFL           | 3366 - 3619 | x     | x     |
| CDM            | 3366 - 3621 | x     |       |
| " ap           | 3368 - 3619 | x     | x     |
| " pp           | 3367 - 3620 |       |       |
| B              | 492 - 1692  | x     | x     |
| "              | 1678 - 3370 | x     |       |
| T              | 1200 - 2001 | x     |       |
| CBL            | 85 - 1678   | x     |       |
| "              | 1250 - 3366 | x     |       |
| CBL/           |             |       |       |
| VDL            | 3205 - 3589 | x     |       |
| SRS            | 80 - 3618   |       | x     |
| Mud            | 690 - 3621  |       | x     |

| CONVENTIONAL CORES |               |          |         |     |
|--------------------|---------------|----------|---------|-----|
| NO                 | INTERVAL m    | RECOVERY |         |     |
|                    |               | m        | QUALITY | %   |
| 1                  | 3447.5-3465.8 | 18.3     |         | 100 |
| 2                  | 3465.8-3474.5 | 8.7      |         | 100 |
| 3                  | 3474.5-3491.5 | 17.5     |         | 100 |
| 4                  | 3492.5-3510.7 | 18.2     |         | 100 |
| 5                  | 3510.7-3519.7 | 9.0      |         | 100 |
| 6                  | 3519.7-3538.4 | 18.7     |         | 100 |
| 7                  | 3538.4-3556.7 | 17.4     |         | 95  |

| TESTS |    |             |                                                           |          |         |
|-------|----|-------------|-----------------------------------------------------------|----------|---------|
| TYPE  | NO | INTERVAL m  | RECOVERY                                                  | FSIP psi | FFP psi |
| DST   | 1  | 3536 - 3552 | 60.5 BWPD. Saline form. water. 141000 ppm Cl <sup>-</sup> | 6460     | 3813    |
| "     | 2  | 3527 - 3530 | 37.5 BOPD, 39° API                                        | 6957     | 3241    |
| "     | 3  | 3453 - 3472 | 1/2" ch. 6928 BOPD, 39° API, 2.61 MMCFGPD.<br>GOR 376     | 7089     | 6744    |

REMARKS