
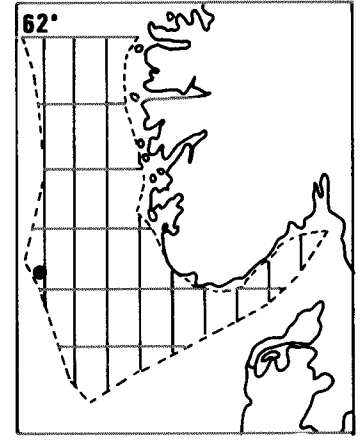


WELL NO.: 15/9-1

OPERATOR: STATOIL

TOTAL DEPTH 3734 m
 ELEV KB 25 m
 WATER DEPTH 106 m

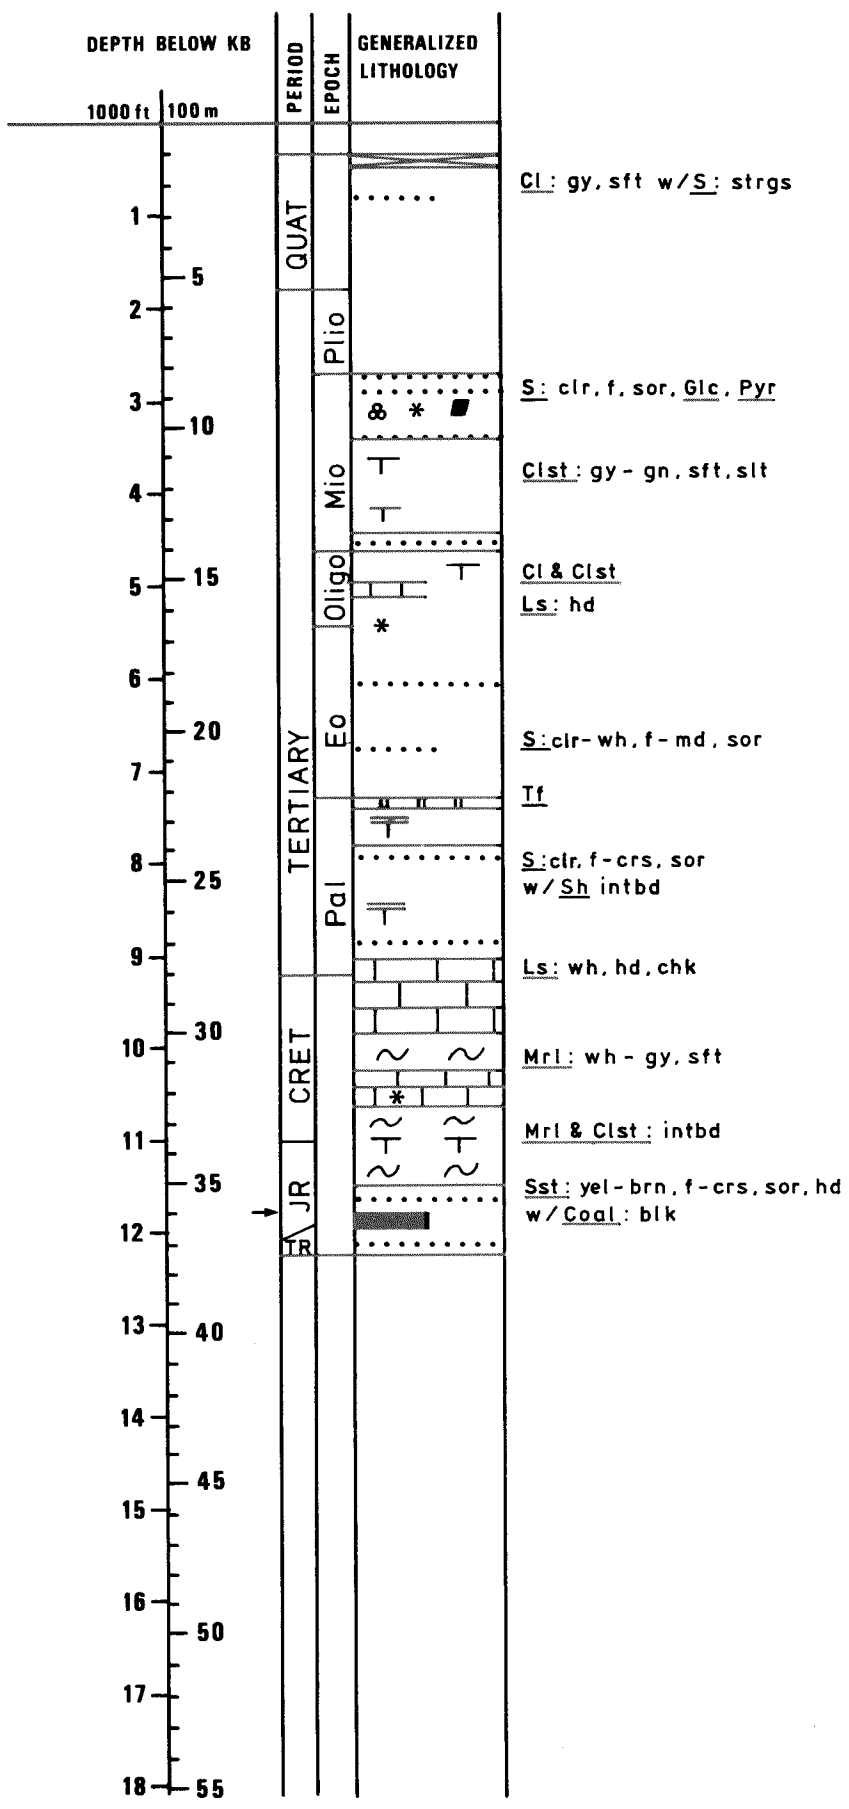

- | | | | |
|--|----------------------|--|------------------------|
| | Conglomerate Breccia | | Metamorphic |
| | Sand Sandstone | | Igneous |
| | Silt Siltstone | | Lignite Coal |
| | Clay Claystone | | Chert |
| | Shale | | Pyrite Glauconite |
| | Marl | | Macrofossil Fragment |
| | Limestone | | Microfossil Plant remn |
| | Dolomite | | Sandy Sandy (Sandy) |
| | Anhydrite Gypsum | | Argillaceous |
| | Rock salt | | Tuffaceous |

Core
 Unconformity

- | | |
|-------|------------|
| Plio | Pliocene |
| Mio | Miocene |
| Oligo | Oligocene |
| Eo | Eocene |
| Pal | Paleocene |
| Dan | Danian |
| Cret | Cretaceous |
| JR | Jurassic |
| TR | Triassic |
| Perm | Permian |
| Basem | Basement |
| E | Early |
| M | Middle |
| L | Late |

WELL NO 15/9-1 FIELD Sleipner
 COORDINATES 58° 28' 19.00"N 01° 45' 11.76"E
 LICENSEE Statoil/Esso
 LICENSE NO 046
 PERMIT NO 171
 CONTRACTOR Ross Drilling Co. A/S
 RIG Ross Rig
 SPUD DATE 24. February 1977
 COMPLETION DATE 30. May 1977

SPUD CLASSIF Wildcat
 COMPL CLASSIF Gas & oil discovery. P&A.
 FMTN AT TD Late Triassic
 PROD FMTN Middle Jurassic
 REMARKS :

Drillpipe stuck at 3647 m.
 Borehole was sidetracked from
 3450 m.

CASINGS

TYPE	DIAM inches	DEPTH BELOW KB m	HOLE DIAM inches	DEPTH BELOW KB m
COND	30	168	36	168
SFC	20	398	26	416
INT	13 3/8	1203	17 1/2	1217
INT	9 5/8	2849	12 1/4	2867
INT				
LINER	7	3734	8 1/2	3734

CONVENTIONAL CORES

NO	INTERVAL m	RECOVERY		
		m	QUALITY	%
1	3521.0-3539.3	18.3		100
2	3539.3-3557.5	18.2		100
3	3557.5-3567.7	10.2		100
4	3567.7-3586.0	14.5		79
5	3586.0-3603.1	14.5		85
6	3603.1-3621.3	18.2		100
7	3621.3-3639.1	17.8		100
8	3639.1-3657.4	18.3		100
9	3657.4-3675.5	18.1		100

AVAILABLE LOGS

TYPE	INTERVAL m	1/200	1/500
GR	131 - 168	x	x
ISF/			
Sonic	168 - 1218	x	x
"	1204 - 2868	x	x
"	2846 - 3736	x	x
FDC/			
CNL	397 - 1216	x	x
"	1204 - 2869	x	x
"	2846 - 3736	x	x
DLL/			
MSFL	3490 - 3736	x	x
CDM	2846 - 3736	x	
" ap	2846 - 3736	x	x
CBL	400 - 1203	x	x
"	1450 - 2842	x	
CBL/			
VDL	2710 - 3709	x	x
SRS	168 - 3736		x
Mud	168 - 3734		x

TESTS

TYPE	NO	INTERVAL m	RECOVERY	FSIP psi	FFP psi
DST	1	3655-3660	3/4" ch. 1330 BOPD, 26 ^o API, 1.4 MMCFGPD, GOR 1067.	6387	
"	2	3602-3607	1" ch. 812 BOPD, 45.4 ^o API, 26 MMCFGPD, GOR 32000.	6084	

REMARKS