




# WELL NO.: 33/9-4

# OPERATOR: MOBIL

TOTAL DEPTH 3076 m

ELEV KB 25 m

WATER DEPTH 144 m

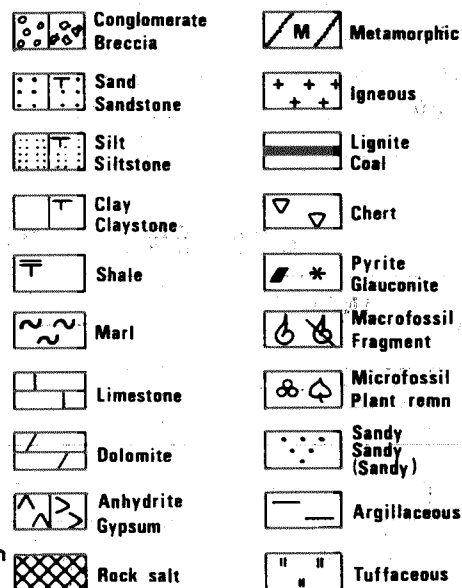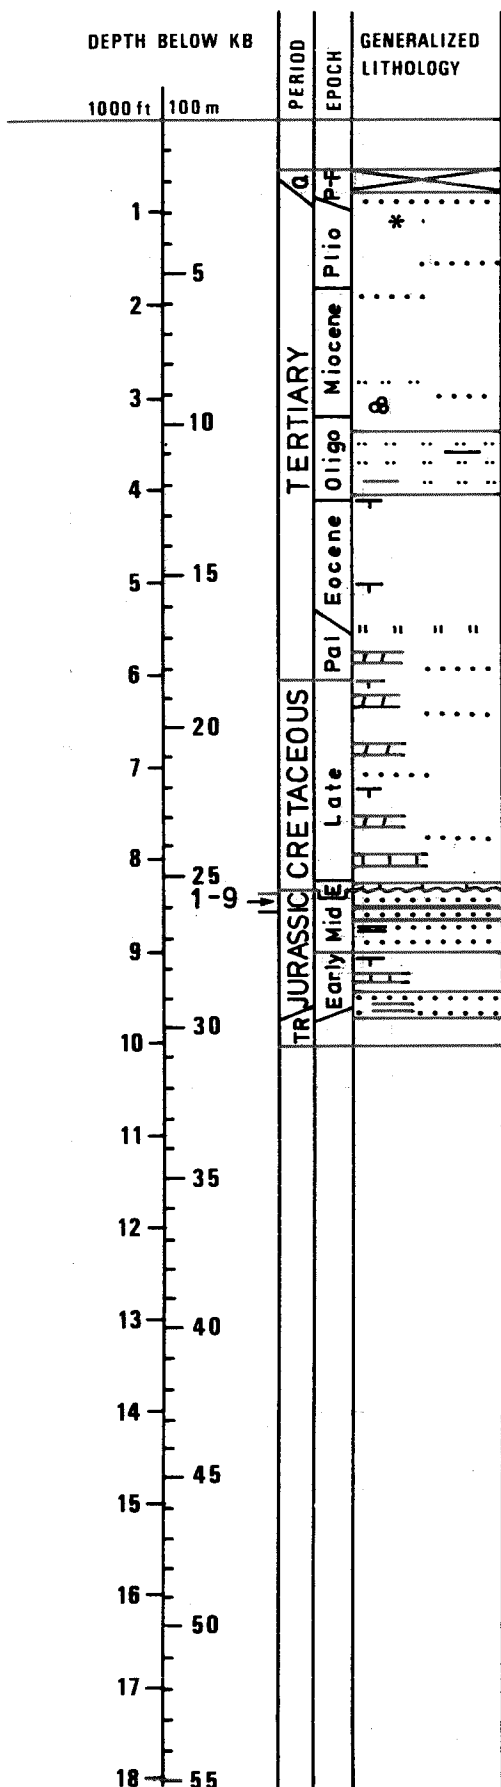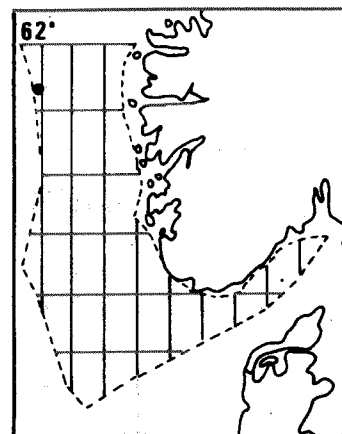

← Core  
 ~~~~~ Unconformity

Plio Pliocene  
 Mio Miocene  
 Oligo Oligocene  
 Eo Eocene  
 Pal Paleocene  
 Dan Danian  
 Cret Cretaceous  
 JR Jurassic  
 TR Triassic  
 Perm Permian  
 Basem Basement  
 E Early  
 M Middle  
 L Late

WELL NO 33/9-4 FIELD Statfjord  
 COORDINATES 61°19'46.57"N 1°54'43.04"E  
 LICENSEE Statoil/Mobil Group  
 LICENSE NO 37  
 PERMIT NO 135  
 CONTRACTOR Rowan Companies Inc.  
 RIG Norskald  
 SPUD DATE 30. July 1975  
 COMPLETION DATE 17. September 1975

SPUD CLASSIF Appraisal  
 COMPL CLASSIF Oil discovery  
 FMTN AT TD Late Triassic  
 PROD FMTN Statfjord  
 REMARKS:

| CASINGS |             |                  |                  |                  |
|---------|-------------|------------------|------------------|------------------|
| TYPE    | DIAM inches | DEPTH BELOW KB m | HOLE DIAM inches | DEPTH BELOW KB m |
| COND    | 30          | 230              | 36               | 230              |
| SFC     | 20          | 477              | 26               | 488              |
| INT     | 13 3/8      | 1694             | 17 1/2           | 1703             |
| INT     | 9 5/8       | 3044             | 12 1/4           | 3076             |
| INT     |             |                  |                  |                  |
| PROD    |             |                  |                  |                  |

| AVAILABLE LOGS |             |       |       |
|----------------|-------------|-------|-------|
| TYPE           | INTERVAL m  | 1/200 | 1/500 |
| ISF/           |             |       |       |
| Sonic          | 229 - 484   | x     | x     |
| "              | 476 - 1700  | x     | x     |
| "              | 1694 - 3074 | x     | x     |
| FDC/           |             |       |       |
| CNL            | 1695 - 3074 | x     | x     |
| DLL/           |             |       |       |
| MSFL           | 1694 - 3075 | x     | x     |
| CDM            | 1694 - 3074 | x     |       |
| " ap           | 1694 - 3074 | x     | x     |
| SRS            | 484 - 3074  |       | x     |
| Mud            | 240 - 3075  |       | x     |

| CONVENTIONAL CORES |               |          |                  |     |
|--------------------|---------------|----------|------------------|-----|
| NO                 | INTERVAL m    | RECOVERY |                  |     |
|                    |               | m        | QUALITY          | %   |
| 1                  | 2547.2-2555.4 | 6.4      | Good             | 78  |
| 2                  | 2555.4-2564.9 | 1.7      | "                | 18  |
| 3                  | 2564.9-2568.6 | 3.7      | Unconsolidated   | 100 |
| 4                  | 2568.6-2577.7 | 9.1      | Mostly unconsol. | 100 |
| 5                  | 2577.7-2581.1 | 3.4      | Unconsolidated   | 100 |
| 6                  | 2581.1-2585.0 | 2.3      | Bits & pieces    | 58  |
| 7                  | 2585.0-2594.2 | 9.1      | Mostly good      | 100 |
| 8                  | 2594.2-2603.3 | 3.4      | Bits & pieces    | 37  |
| 9                  | 2603.3-2612.4 | 8.8      | " "              | 97  |

| TESTS |    |             |                                         |          |         |
|-------|----|-------------|-----------------------------------------|----------|---------|
| TYPE  | NO | INTERVAL m  | RECOVERY                                | FSIP psi | FFP psi |
| DST   | 1  | 2608 - 2610 | 14/64" ch. 771 BOPD, 38.0° API, GOR 649 | 5640     | 5558    |
| "     | 2  | 2555 - 2560 | 3/4" ch. 7324 BOPD, 36.4° API, GOR 886  | 5638     | 5596    |

REMARKS :