
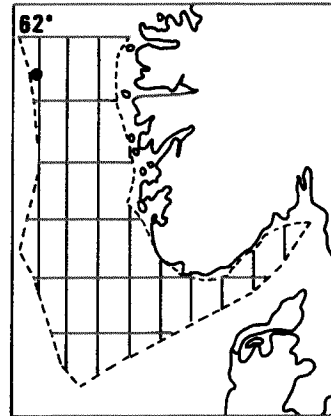


# WELL NO.: 33/9-5

## OPERATOR: MOBIL

TOTAL DEPTH 3157 m  
 ELEV KB 25 m  
 WATER DEPTH 152 m

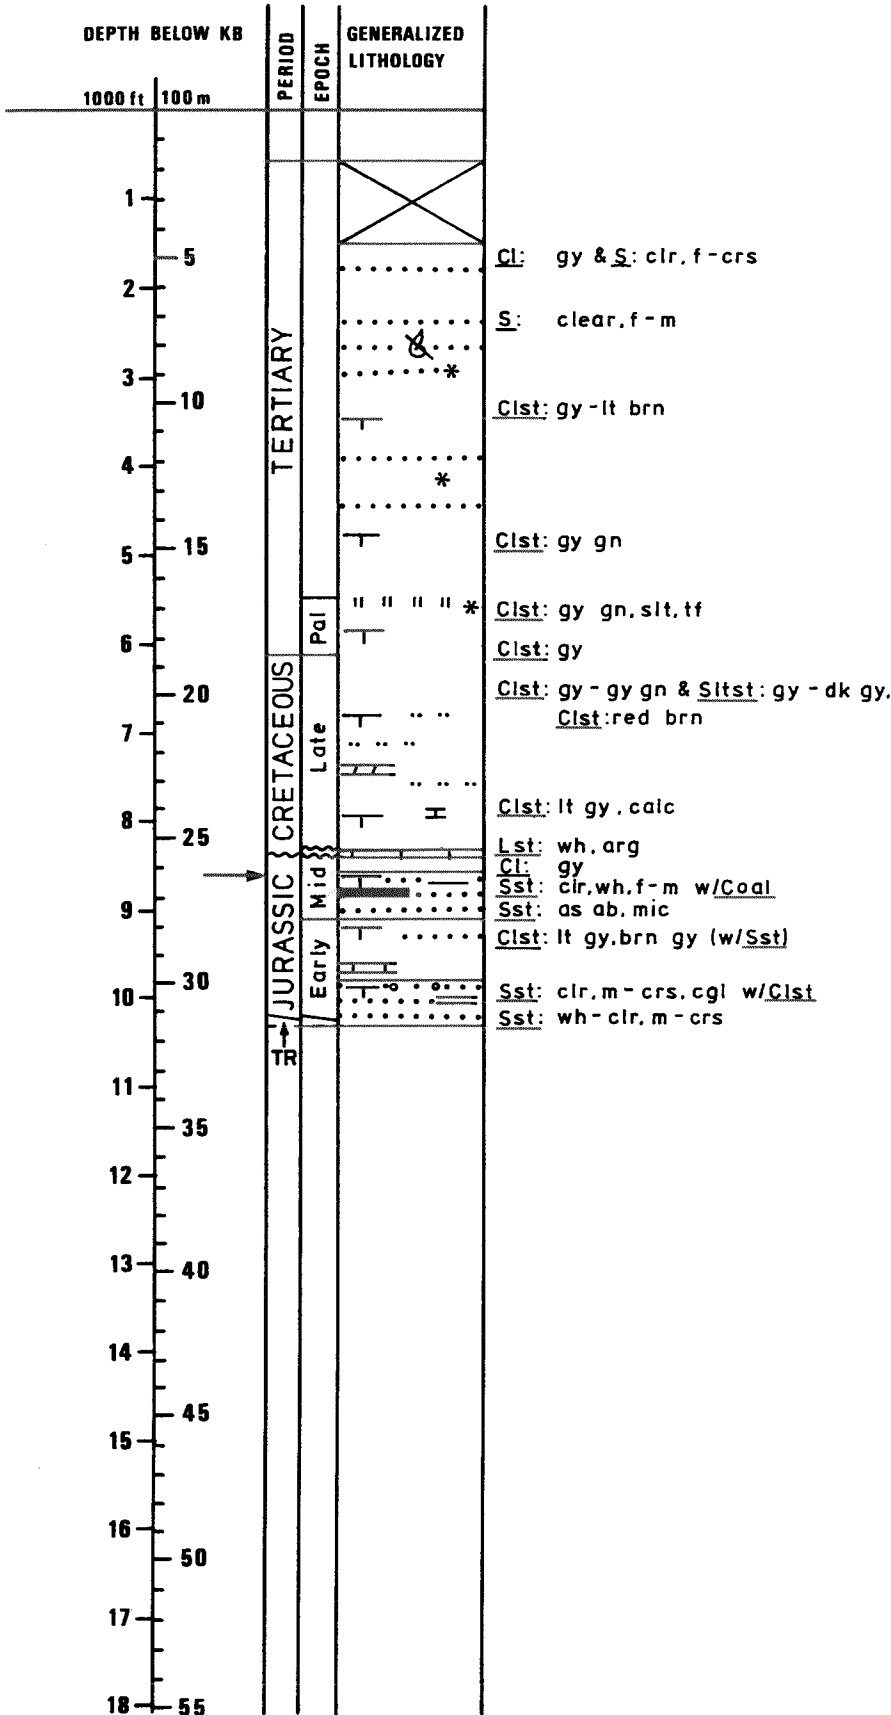

- |  |                      |  |                        |
|--|----------------------|--|------------------------|
|  | Conglomerate Breccia |  | Metamorphic            |
|  | Sand Sandstone       |  | Igneous                |
|  | Silt Siltstone       |  | Lignite Coal           |
|  | Clay Claystone       |  | Chert                  |
|  | Shale                |  | Pyrite Glauconite      |
|  | Marl                 |  | Macrofossil Fragment   |
|  | Limestone            |  | Microfossil Plant remn |
|  | Dolomite             |  | Sandy Sandy (Sandy)    |
|  | Anhydrite Gypsum     |  | Argillaceous           |
|  | Rock salt            |  | Tuffaceous             |

- ← Core  
 ~~~~~ Unconformity

- |       |            |
|-------|------------|
| Plio  | Pliocene   |
| Mio   | Miocene    |
| Oligo | Oligocene  |
| EO    | Eocene     |
| Pal   | Paleocene  |
| Dan   | Danian     |
| Cret  | Cretaceous |
| JR    | Jurassic   |
| TR    | Triassic   |
| Perm  | Permian    |
| Basem | Basement   |
| E     | Early      |
| M     | Middle     |
| L     | Late       |

WELL NO 33/9-5 FIELD Statfjord  
 COORDINATES 61°20'47.87"N 01°56'51.70"E  
 LICENSEE Statoil/Mobil Group  
 LICENSE NO 037  
 PERMIT NO 142  
 CONTRACTOR Ross Drilling Co. A/S  
 RIG Ross Rig  
 SPUD DATE 27. October 1975  
 COMPLETION DATE 01. January 1976

SPUD CLASSIF Appraisal  
 COMPL CLASSIF Plugged & abandoned  
 FMTN AT TD Late Triassic  
 PROD FMTN \_\_\_\_\_  
 REMARKS :

### CASINGS

| TYPE  | DIAM<br>inches | DEPTH<br>BELOW KB<br>m | HOLE<br>DIAM<br>inches | DEPTH<br>BELOW KB<br>m |
|-------|----------------|------------------------|------------------------|------------------------|
| COND  | 30             | 252                    | 36                     | 252                    |
| SFC   | 20             | 456                    | 26                     | 460                    |
| INT   | 13 3/8         | 1889                   | 17 1/2                 | 1903                   |
| INT   |                |                        | 12 1/4                 | 3158                   |
| INT   |                |                        |                        |                        |
| LINER |                |                        |                        |                        |

### CONVENTIONAL CORES

| NO | INTERVAL<br>m | RECOVERY |         |    |
|----|---------------|----------|---------|----|
|    |               | m        | QUALITY | %  |
| 1  | 2609.2-2628.2 | 16.9     |         | 89 |
|    |               |          |         |    |
|    |               |          |         |    |
|    |               |          |         |    |
|    |               |          |         |    |
|    |               |          |         |    |
|    |               |          |         |    |
|    |               |          |         |    |
|    |               |          |         |    |
|    |               |          |         |    |

### AVAILABLE LOGS

| TYPE  | INTERVAL<br>m | 1/200 | 1/500 |
|-------|---------------|-------|-------|
| BHC   | 451 - 1900    | x     | x     |
| ISF/  |               |       |       |
| Sonic | 451 - 1900    | x     | x     |
| "     | 1888 - 3155   | x     | x     |
| IES   | 460 - 3157    | x     | x     |
| FDC/  |               |       |       |
| CNL   | 1888 - 3157   | x     | x     |
| BGT   | 450 - 1895    | x     | x     |
| DLL   | 2449 - 3157   | x     | x     |
| DLL/  |               |       |       |
| MSFL  | 2549 - 3157   |       | x     |
| CDM   | 1888 - 3155   | x     |       |
| " ap  | 1888 - 3155   | x     | x     |
| DIR   | 450 - 1895    |       |       |
| SRS   | 451 - 3155    |       | x     |
| Mud   | 460 - 3157    |       | x     |

### TESTS

| TYPE | NO | INTERVAL<br>m | RECOVERY                             | FSIP<br>psi | FFP<br>psi |
|------|----|---------------|--------------------------------------|-------------|------------|
| FIT  | 1  | 2624.5        | Mud only                             |             |            |
| "    | 2  | 2617.0        | 10.25 l water, traces of oil and mud | 5699        | 5211       |
| "    | 3  | 2611.0        | 10.25 l water, traces of mud         | 5677        | 5521       |
| "    | 4  | 2609.0        | 10.25 l water, traces of mud         | 5673        | 4595       |
| "    | 5  | 2607.0        | 9 l oil, 35.8° API, 2.25 l water     | 5665        | 2685       |
| "    | 6  | 2650.0        | 10.25 l water, traces of mud         | 5754        | 5740       |
| "    | 7  | 2607.8        | 10.25 l water                        | 5674        | 3170       |

REMARKS