


AVAILABLE LOGS			
LOG TYPE	INTERVALS	1/200	1/500
ISF LSS GR	280 - 1002	X	X
ISF SONIC	988 - 2506	X	X
ISF SONIC MSFL	2500 - 3616	X	X
ISF SONIC	3350 - 3970	X	X
ISF SONIC	3900 - 4531	X	X
ISF SONIC	4555 - 5007	X	X
FDC CNL	988 - 2506	X	X
LDT CNL	2500 - 3617	X	X
FDC CNL	3347 - 4557	X	X
LDT CNL	4556 - 5003	X	X
DLL MSFL	3347 - 4528	X	X
DLL MSFL	4555 - 5003	X	X
CDM	988 - 2505	X	
CDM	2500 - 3529	X	
CDM	3347 - 4525	X	
CDM	4555 - 5008	X	
CDM AP	988 - 2506	X	X
CDM AP	2501 - 3530	X	X
CDM AP	3348 - 4525	X	X
CDM AP	4557 - 5008	X	X
RFT	1948 - 2489	X	
RFT	2571 - 3291	X	
FIT (SAMPLE # 2)	3002 - 3002	X	
CBL VDL	287 - 2500	X	
CBL VDL	1350 - 3570	X	
MUD	295 - 4999		X
VELOCITY (Seismic Calibration)	988 - 5007	1:1000	

(Vsp, 10cm/s 1stk)
 (Geogram Synth.Seism 286 - 5000,10cm/s, 2stk)
 (Normal Polarity zero/Minimum Phase, 1stk)
 (Seismic(check Shots),288-5000, 1stk)
 (Seismic(VSP-49Levels)2394-3561, 1stk)
 (Seismic(vsp), 3323-5005, 1stk)

MUD PROPERTIES				
DEPTH BELOW KB m	WEIGHT g/cm3	FUNNEL VISC. sec	FILTRATE LOSS cm3	REMARKS
730	1.13	42		
1020	1.10	58		
1380	1.14	54		
1920	1.15	48		
1980	1.14	48		
2615	1.15	53		
2840	1.17	52		
2910	1.16	48		
3080	1.23	50		
3600	1.31	56		
3430	1.35	62		
3560	1.66	85		
3720	1.69	102		
3800	1.68	81		
3900	1.66	68		
4000	1.68	53		
4075	1.66	50		
4410	1.65	56		
4510	1.66	60		
4670	1.66	70		
4800	1.65	70		
4990	1.63	70		

DRILL BIT CUTTINGS AND WET SAMPLES		
SAMPLE TYPE	INTERVAL BELOW KB	NUMBER OF SAMPLES
CUTTINGS	360 - 4999	1080
WET SAMPLES	360 - 4449	1062

SHALLOW GAS	
DEPTH INTERVAL m KB	REMARKS
	NONE

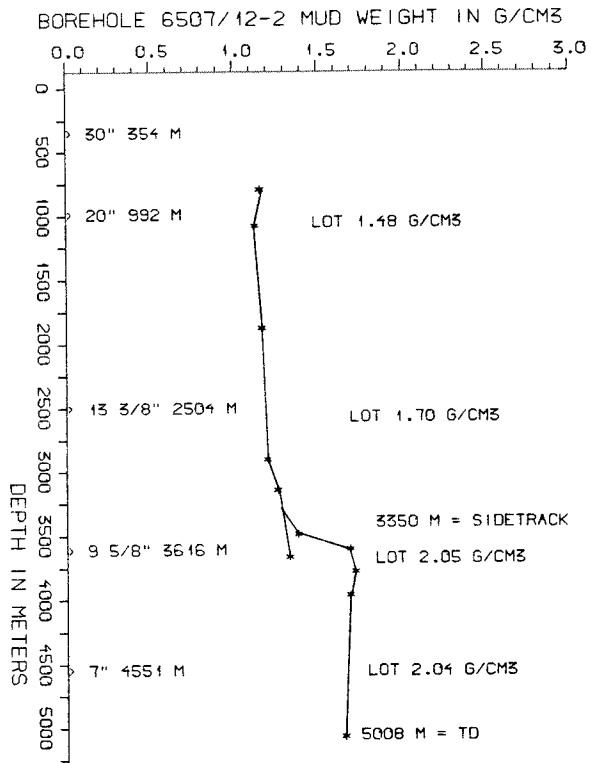

GEOLOGICAL TOPS

WELL: 6507/12-2

	Depth m (RKB)
H-7	286
H-6	1305
H-5	1717
H-5-2	1717
H-5-1	1782
H-4	1816
H-3	
H-2	1872
H-2-2	1872
H-2-1	1878
H-1	1922
H-1-4	1922
H-1-3	2005
H-1-2	2076
H-1-1	2234
Upper salt (Triassic)	3454
Lower salt (Triassic)	4358
Base lower salt (Triassic)	4781
	T.D. = 5008